

DATASHEET

Patent Pending




Antenna model UL-5000-319

A broadband, rugged, mobile radio antenna featuring a high ESD (Electro-Static Discharge) isolation. With modest dimensions of 1.5"/4 cm (OD) x 4"/10 cm (height), this antenna radiates with a typical peak omnidirectional gain of +4 dBil, when mounted on a large metal surface of at least 16"/40 cm radius. This antenna will survive a 20 ft drop onto asphalt and continue operating. Internally, the radiating element is DC grounded and the feedpoint is DC isolated beyond 1 kV.

- Frequency range:** 490-512 MHz
- Coverage:** Omni-directional, low azimuthal ripple
- Polarization:** Linear, Vertical
- Gain:** +4 dBil
- Nominal Impedance:** 50 ohm (RF), Open Circuit (DC) 1 kV isolation
- VSWR:** 2.0
- Connector:** NMO, Female
- Dimensions:** Housing 3.8 cm (1.5") OD x 10.3 cm (4.05") h
Bottom flange 5 cm (2") OD x 3 mm (0.12") h
- Mounting:** direct NMO connector mount
- Operating Temperatures:** -40°C to +85°C
- Shock:** Operates after drop from 6 m/20 ft onto asphalt
- Weight:** 100 g / 0.25 lbs
- Shipping Weight:** 200 g / 0.45 lbs

NOTES:

Requires a ground plane (normally mounts on a metal body)
Its large bandwidth allows this antenna to be used for the surveillance of signals ranging from 200 MHz to 1 GHz

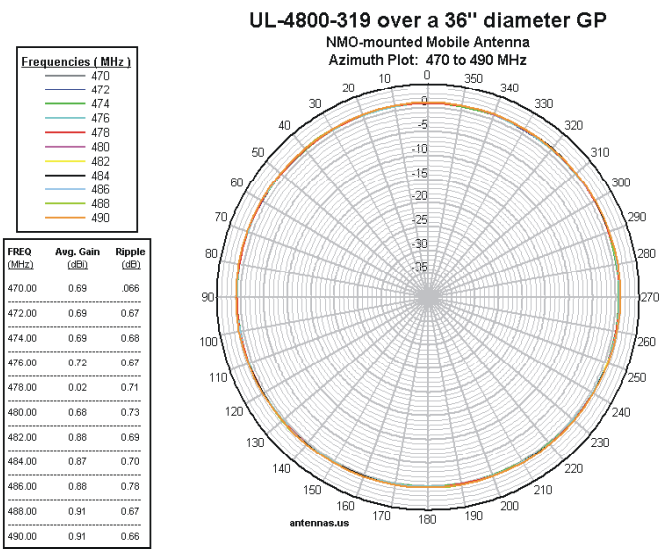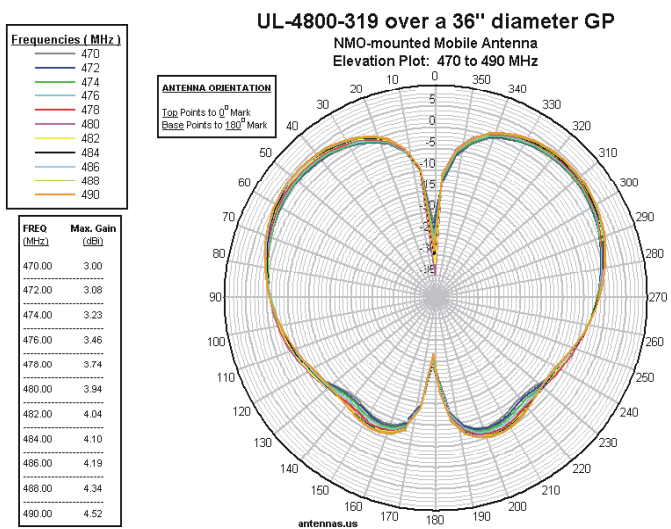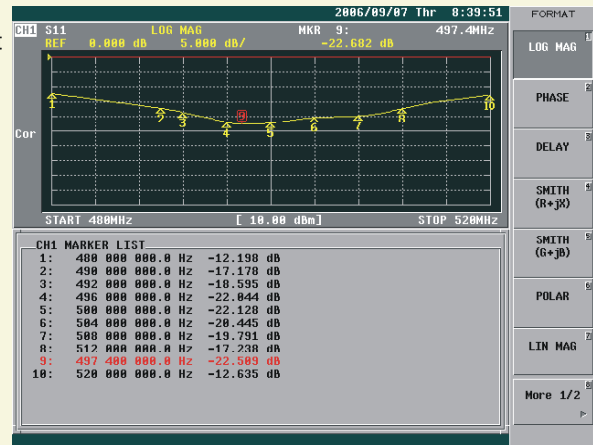

specifications subject to change without notice

antennas.us
a Sales division of Myers Engineering International, Inc.